



FOUR GAS PERSONAL MONITOR

MODEL GX-2009



World Smallest 4 Gas Monitor

Approx. 70(H) × 75(L) × 25(D) mm, 130g
[2.76"H × 2.95"L × 1.00"D, 4.6 oz]

APPROVALS

- ATEX Ex II 1G Ex ia IIC T4
- IECEx Zone 0 Ex ia IIC T4
- CSA Intrinsically safe, class I, Division I, Groups A, B, C, D
- CE
- JML Ex ia IIC T4

FEATURES

- Simultaneous and real-time detection of 4 gases LEL, O₂, H₂S & CO
- Large simultaneous display for 4 gases
- Water and dust resistant, IP67
- Loud alarm buzzer 95dB at 30cm.
- 3 bright LED alarm windows
- Rechargeable Ni-MH battery pack
- Continuous operation for up to 20 hours
- Built in shock-resistant coating
- RFI shielded housing
- Vibration alarm
- Datalogging standard
- Auto-calibration
- STEL and TWA readouts
- Peak hold readout
- Continuously displays current time

APPLICATION

- Confined Space
- Refineries/Petrochemical
- Utilities
- Chemical Plants
- Hazardous Material
- Water/Wastewater Treatment
- Fire Services
- Mining
- Pharmaceuticals

RIKEN KEIKI is proud to offer the smallest 4-gas monitor in the world, the Model GX-2009. Weighing only 130g (4.6 ounces) and about the size of a pager (70 (H) × 75 (L) × 25 (D) mm), the GX-2009 simultaneously monitors combustibles, oxygen, carbon monoxide, and hydrogen sulfide. The GX-2009 is armed with standard features like a vibrating alarm, autocalibration, datalogging, and it even tells the time! All of these controls and features are operated through 2 simple buttons. Utilizing the standard charger, the Ni-MH battery pack will operate for 20 hours and fully recharge in 180 minutes. Also available is the datalogging software program which is Windows XP and Vista compatible. The GX-2009 is also compatible with the Data Cal 2000 instrument maintenance system and SM-2009U single calibration station. The GX-2009 is designed around the world's smallest gas sensors. Utilizing catalytic combustion, electrochemical and galvanic sensor technologies, each miniaturized sensor is manufactured by RIKEN KEIKI with the same high quality control that has made our sensors and instruments the most reliable and long lasting monitoring devices in the industry.



ISO 9001 950R-007
ISO 14001 97ER-005
TOKYO PLANT - OKEGAWA MANUFACTURING
DIVISION - HAKODATE FACTORY



COMPONENT DESIGNATIONS

Model GX-2009 has advanced features including large LCD which can display 4-gas concentrations, current time, and battery indicator simultaneously. Extra loud alarm buzzer, three bright LED lamps and IP67 water and dust proof construction with built in impact resistant protective cover. All controls and features are operated by 2 buttons.

LCD display

Large, simultaneous 4 gas display.



Alarm lamps

Three bright LED indications with powerful vibration alarm



Audible alarm

Loud distinct tone with two honeycomb buzzer openings. 95dB at 30cm distance

Switches

Easy operation with two switches

Sensor block



Top view

Rear view



Side view

Bottom view



Solid low profile, 360-degree clip

Display screen examples

Normal measurement



Peak screen



TWA screen



STEL screen




GX-2009 gas combination available

Four gases	Type A	LEL / O ₂ / H ₂ S / CO
Three gases	Type B	LEL / O ₂ / H ₂ S
	Type C	LEL / O ₂ / CO
Two gases	Type D	LEL / O ₂
	Type E	H ₂ S / O ₂
	Type F	CO / O ₂

Please specify gas combination when ordering.

Extendable charging station

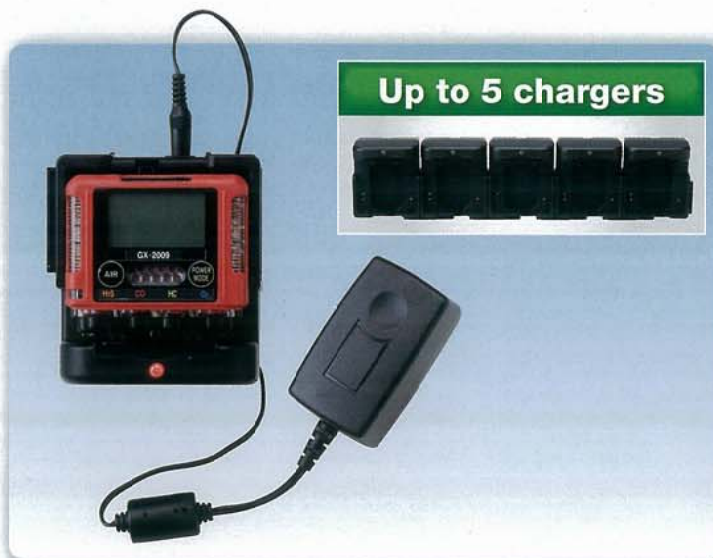


Data logger download via IrDA communication



Accessories

Standard accessories

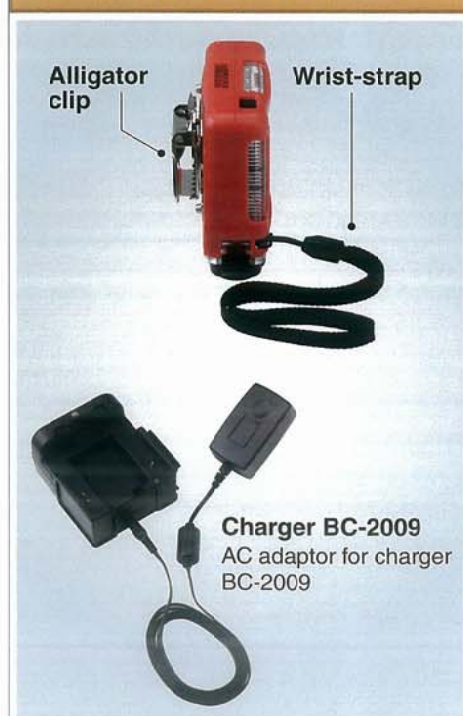

Optional accessories



MODEL GX-2009

Gas detected	Combustible gases	Oxygen (O ₂)	Hydrogen sulfide (H ₂ S)	Carbon monoxide (CO)
Detection principle	Catalytic combustion	Galvanic cell	Electro-chemical cell	
Detection range (Increments)	0-100%LEL (1%LEL)	0-40%VOL (0.1%VOL)	0-100.0ppm (0.5ppm)	0-500ppm (1ppm)
Sampling method	Diffusion			
Display	Simultaneous display. Digital LCD with segments, auto backlight at alarm display.			
Alarm sounds	95dB at 30cm			
Preset alarms (User adjustable)	1st alarm 10%LEL 2nd alarm 50%LEL Over alarm 100%LEL	Low alarm 19.5%Vol High alarm 23.5%Vol Over alarm 40.0%Vol	1st alarm 10.0ppm 2nd alarm 30.0ppm TWA alarm 10.0ppm STEL alarm 15.0ppm Over alarm 100.0ppm	1st alarm 25.0ppm 2nd alarm 50.0ppm TWA alarm 25.0ppm STEL alarm 200ppm Over alarm 500ppm
Types of alarms	Gas alarms : 2 preset alarms, STEL, TWA, overscale alarm Trouble alarms : Sensor disconnection, low battery, circuit error, calibration range error			
Display of alarm	Gas alarms : Flashing LEDs, intermittent buzzer, Flashing gas value, vibration Trouble alarms : Flashing LEDs, intermittent buzzer, display of error message			
Functions	Manual backlight LCD (Automatic at alarm) Data logging STEL, TWA Peak hold Alarm trend Direct charging Continuous display of current time Autocalibration			
Output signal type	IrDA for Data logger			
Operating temp.&humidity	-20°C to +50°C (-4 to 122°F), 0 to 95%RH, non-condensing			
Response time	Within 30 seconds (T90)			
Continuous operation	Up to 20 hours after full charge (Up to 14 hours after 90 min charge)			
Power source	Direct charging Ni-MH battery pack, (can be fast charged in just 180 min)			
Case materials	Rubber coated polycarbonate			
Ingress Proof Rating	IP67			
Safety design/Approvals	<ul style="list-style-type: none"> · ATEX (Ex) II 1G Ex ia IIC T4 · IECEx Zone 0 Ex ia IIC T4 · CSA Intrinsically safe, class I, Division I, Groups A, B, C, D · CE · JML Ex ia IIC T4 			
Dimensions & Weight	Approx. 70 (H) × 75 (L) × 25 (D) mm (2.76"H × 2.95" L × 1.00"D) Approx. 130g (4.6 ounces)			
Controls	Two buttons : POWER/MODE, AIR			
Standard accessories	(1) Wrist strap (2) Alligator clip (3) Battery charger			
Optional accessories	(1) Hand aspirator sampling kit (3) Data logger management program (5) Single point calibration station SM-2009U		(2) Sample-draw pump model RP-6 (4) Extension connector for chargers	

Specifications subject to change without notice.

NOTE :

STEL= Short Term Exposure Limit

TWA= Time Weighted Average

L E L= Lower Explosive Limit

ppm= Parts Per Million

RIKEN KEIKI Co.,Ltd.

★ Distributed by:



Ex-Ox-Tox Gasdetectie
Westerdreef 5V
2152 CS Nieuw-Vennep
Telefoon: 0252 620885
E-mail: info@exotox.nl
Website: www.exotox.nl